



EURO SECURE

SECURING HOMES SINCE 2008



ACCESSORIES RANGE

WIRELESS

All accessories are wireless and easy to pair with any of the alarm kits.

Features

Remote Control Keyfob

- Compatible with all ERA Wireless Alarm Systems
- Quick arm and part-arm
- Has split ring attachment so remote can be attached to a key-ring




To order visit www.euro-secure.com
or call 01642 309575

RFID Contactless Tag

- Compatible with the ERA Invincible and Vault Alarm Systems
- Users can disarm the system with a simple 132161616Q swipe across the panel
- Password is not needed. Useful for children or temporary users e.g. carers
- Will notify when programmable users have arrived home via SMS
- Has split ring attachment so remote can be






BUILD & ENHANCE YOUR SYSTEM AT ANY TIME WITH EASY PAIRING ACCESSORIES



EUROSECURE
SECURING HOMES SINCE 2008

To order visit www.euro-secure.com
or call 01642 309575

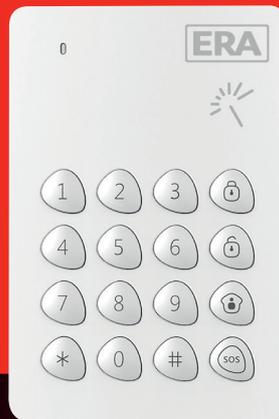

Wireless Touch RFID Keypad

- Compatible with all ERA Wireless Alarm Systems, ideal for larger properties
- Allows you to arm and disarm with the 4-digit user password
- The keypad can also be connected to an electronic door lock to work as an access control system for homes and offices
- Includes entry/exit delay function and a speed SOS dial panic function
- Battery operated. The box contains a Keypad, Batteries, all fixings and instruction manual

Range Extender

- Compatible with all ERA Wireless Alarm Systems
- Supports up to 40 accessories
- Ideal for use where a longer range is required to reach areas where the signal may be interrupted



Personal Alert Button

- Compatible with all ERA Wireless Alarm Systems
- Compact and easy to use. A single press of the red button will trigger your Control Panel
- The box contains an SOS Personal Alert Button, a battery and instruction guide



Technical Information

RFID Keypad	Parameter
Part Number	KP700
Power Supply	DC 12V or 3 x AAA Batteries
Standby Current	≤3uA (powered by batteries)
Alarm Current	≤10mA
Transmitting Distance	≤80metres (in open field conditions)
Supported Accessories	50 RFID Tags
Radio Frequency	433MHz
Housing Material	ABS Plastic
Operation Conditions	Temperature - 10°C -55°C Relative Humidity ≤80% (non - condensing)
Dimensions (L x W x D)	135mm x 90mm x 15mm

RFID Contactless Tag	Parameter
Part Number	TAG26
Frequency	125KHz

Personal Alert Fob	Parameter
Part Number	SOS100
Power Supply	DC 3V (1 x CR2032 Button Cell Battery)
Alarm Current	≤7mA
Transmitting Distance	≤80metres (in open field conditions)
Operation Condition	433MHz
Housing Material	ABS Plastic
Operation Conditions	Temperature - 10°C -55°C Relative Humidity ≤80% (non - condensing)
Dimensions (L x W x D)	52mm x 54.5mm x 10mm

Range Extender	Parameter
Part Number	RT101
Power Supply	AC 110V-240V 50/60Hz
Back-up Power	3.7V 600mAh Lithium Battery 2.22Wh
Standby Current	≤15.5mA
Alarm Current	≤11A
Transmitting Distance	300metres (in open field conditions)
Receiving Distance	90metres (in open field conditions)
Supported Accessories	40pcs
Radio Frequency	433MHz
Housing Material	ABS Plastic
Operation Conditions	Temperature - 10°C -55°C Humidity ≤80% (non - condensing)
Dimensions (L x W x D)	140mm x 86mm x 87mm

Remote Control Keyfob	Parameter
Part Number	EREM
Power Supply	DC 3V (CR2025 Coin Battery x 1pc)
Alarm Current	≤7mA
Radio Frequency	≤80metres (in open field conditions)
Housing Material	ABS Plastic
Operation Conditions	Temperature - 10°C -55°C Humidity ≤80% (non - condensing)
Dimensions (L x W x D)	58mm x 31mm x 9.5mm